


Technical Specifications

Rapture™ Seating

KI
1330 Bellevue Street
Green Bay, Wisconsin 54302

TEL (920) 468-8100
FAX (920) 468-0280

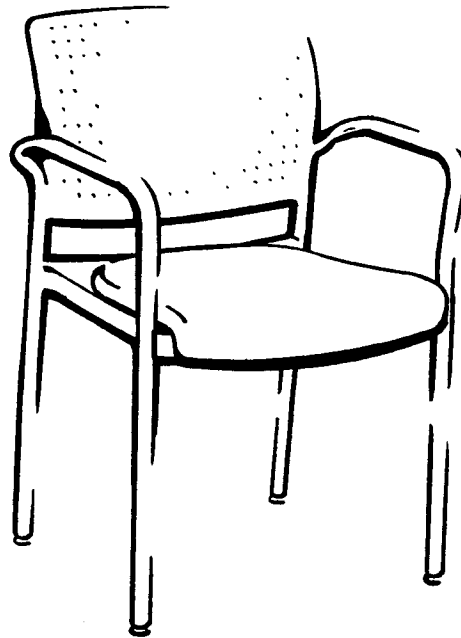

Frame

Legs are 1" OD x 16-gauge tubular steel. Cross members are 1" OD x 14-gauge tubular steel. Side members are 7/8" OD x 14-gauge tubular steel. All joints are welded.

Armrests

Injection molded nylon. Armrests are attached to the backrest without fasteners. Arms are assembled over the backrest attachment tubes of the frame when the backrest is installed. The backrest is then locked in place using a patented "turn and lock" feature.

Polypropylene Seat and Backrest


Injection-molded polypropylene.

Upholstered Seat and Back

Molded urethane foam is attached to the seat board, which is injection molded polypropylene. Slab urethane foam is attached to the back board, which is injection molded polypropylene. The boards are attached to the seat and back using four 10-24 x 3/8" truss head screws. Seat screws are not exposed. Backrest screws are exposed and are color matched to the polypropylene.

Glides

Chrome plated steel or plastic.

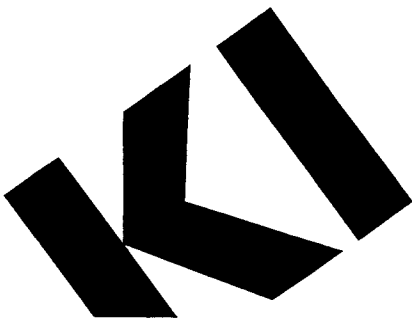

Frame Finishes

Baked-on electrostatically-applied 45 sheen epoxy powder coating, or bright nickel-chrome plating.

Transport Dolly

Tubular steel frame, black powder-coated finish. Four 5" swivel wheels.