


Technical Specifications

Silhouette™ Chair

KI
1330 Bellevue Street
Green Bay, Wisconsin 54302

TEL (920) 468-8100
FAX (920) 468-0280

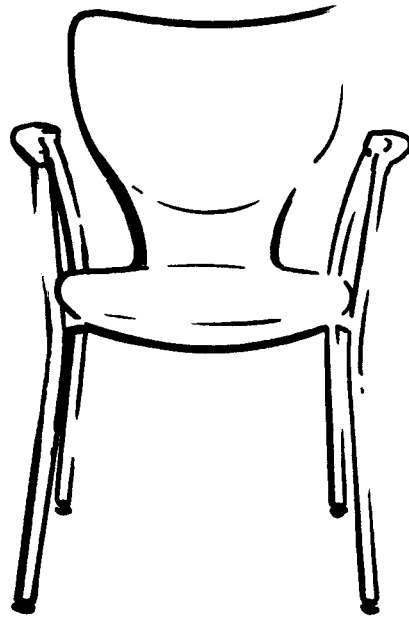

Frame

Frame of 3/4" o.d. x 14 gauge tubular steel. Two leg frames are joined by means of "U"-shaped metal plates. Legs and side tubes are welded.

Shells

One piece, textured polyamide with fiberglass reinforcement. Back of shell is ribbed to allow back flex.

Armrests

Polyamide reinforced with fiberglass. Armrest colors are black, warm grey, blue grey, and sand.

Tube End Caps (No Arm Chair)

Molded plastic. The end caps will be available in black, warm grey, blue grey, and sand.

Floor Glides


Polypropylene ball and socket joints to provide better leveling on any floor. Black only.

Stacking Bumper

Plastic seat pan (black) for stacking support.

Upholstered Seat

Seat is constructed of 9-ply beechwood with 3/4" polyurethane foam cushion applied. Fastened to the shell with three screws thru T-nuts embedded in inner structure.

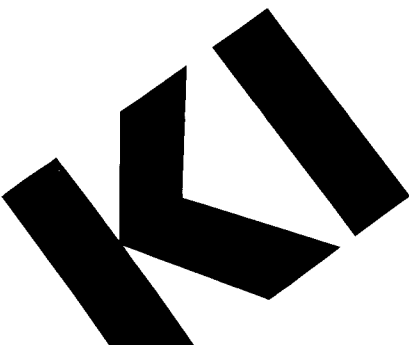

Upholstered Backrest

Back is constructed of 9-ply beechwood with 3/8" polyurethane foam cushion applied. Fastened to the shell with three screws through T-nuts embedded in inner structure.

Ganger

Ganger is chrome-plated steel rod in a male/female configuration. Does not stack.

Frame Finishes

Baked-on, electrostatically applied, 60 sheen epoxy powder coating; or bright nickel-chrome plating.

Transport Dolly

Tubular steel frame, black powder coated finish. Four 5" swivel wheels.